

Alpha Fixed


LED Recessed Down Light

*Architectural
Lighting*

- Architectural Design
- Anti-glare, Low UGR<16 / <19
- Excellent heat dissipation to ensure long life span
- High efficiency COB chipset with high luminous flux
- 1090 Aluminum, polish anodizing, clear diffuser
- High quality Aluminum Alloy Housing
- 5 Years Warranty
- Applications include offices, shops, restaurants, hotels, schools & households

Specifications

Power	10W / 15W
Colour Range	2700 ~ 5000K
Lumen	950 / 1150lm
Input Voltage	AC200 ~ 240V
Power Factor	>0.95
Beam angle	20° / 24° / 38°
CRI	>90 / 95
LED	Citizen COB
Driver	Class II SAA
IP Rating	IP44
Current	260 / 350mA / 36V
Dimmable	Triac / 1-10V / Dali
Housing Colour	Black / White / Silver

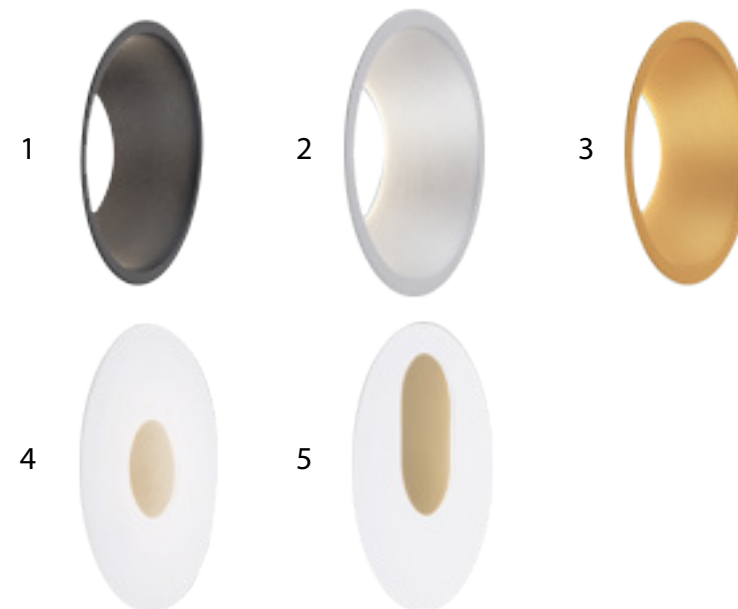

Alpha Fixed

LED Recessed Down Light



MODEL	Wattage (W)	Voltage (V)	CCT (K)	Lumen (lm)	Current (mA)	Beam Angle	Cutout (mm)	Size (mm) (LxWxD)	Surface Colour
GDALP-10W-A	10W	200-240	2700-5000	950	260	24°/38°	Ø68	Ø80*76	B/W/S
GDALP-10W-B	10W	200-240	2700-5000	280	260	20°	Ø68	Ø80*76	B/W/S
GDALP-10W-C	10W	200-240	2700-5000	390	260	20°	Ø68	Ø80*76	B/W/S
GDALP-15W-A	15W	200-240	2700-5000	1100	350	24°/38°	Ø83	Ø95*83	B/W/S
GDALP-15W-B	15W	200-240	2700-5000	360	350	20°	Ø83	Ø95*83	B/W/S
GDALP-15W-C	15W	200-240	2700-5000	480	350	20°	Ø83	Ø95*83	B/W/S