


- Architectural Design
- Adjustable Tilt 0 ~ 25°, 360° Horizontally
- Anti-glare, Low UGR<16 / <19
- Excellent heat dissipation to ensure long life span
- High efficiency COB chipset with high luminous flux
- 1090 Aluminum, polish anodizing, clear diffuser
- High quality Aluminum Alloy Housing
- 5 Years Warranty
- Applications include offices, shops, restaurants, hotels, schools & households

Specifications

Model	GSAPL-9W-G80
Power	9W
Light Source	COB
Light Output	26V/200mA
Lumen Output	670lm
Lumen pr. watt	75lm/w
Colour Temperature	2700K / 3000K / 4000K / 5000K
Beam Angle	20°/ 30°/ 45°
CRI	CRI90 / CRI95
IP	IP20
Driver	ON/OFF, Triac dimmable, DALI/1-10V dimmable
Lifetime	50,000hrs
Energy Class	A -> A++

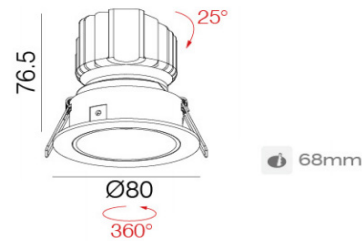

Dimensions

Height	H76.5mm
Diameter	Ø80mm
Cutout	Ø68mm
Finish Colour	Matt white / black



Materials

Base	Aluminium
Screen	PC
Indoor Use	Yes
Lamp Rotation	Yes

Greenlux

37 Chelmsford Street,
Williamstown North VIC 3016 Australia

Phone: 1300 650 625
Email: enquiries@greenlux.com.au

Facebook: [greenluxlighting](https://www.facebook.com/greenluxlighting)
Twitter: [GreenluxLED](https://twitter.com/GreenluxLED)

