


Chain GLS3535 LED Linear Light


Suspended & Surface Mounted

Matching GAS3535 Curve Lighting System



Features

- Various installation ways: Suspended and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Matching with our Model GAS3535 Curve Lighting System

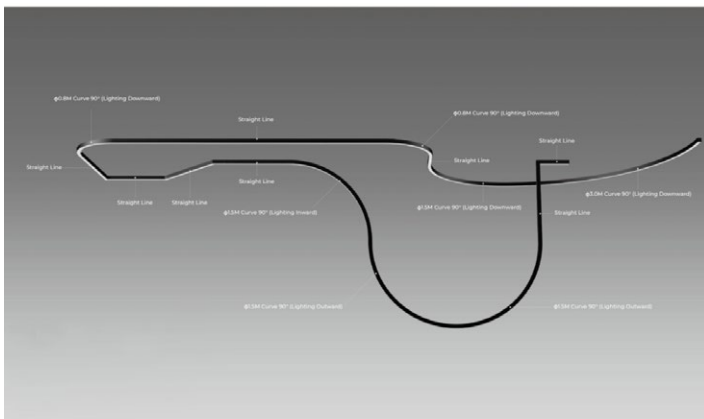

Chain GLS3535 LED Linear Light


Suspended & Surface Mounted

Matching GAS3535 Curve Lighting System

Details



Optional Accessories

Picture	Item	Parameter
	①Profile	Material : AL6063-T5 Profile weight : 1.99kg/2.5M Size : L2500*W35*H35mm Surface processing: Spray
	②Cover	Size : L20000*W32*H3.5mm Light transmittance: 60%
	③End cap	Size : L35*W35*H1.5mm
	④Rigid modular DY8140-24V-20mm	Material : AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 9.6W/pcs ; Lumen : 1060Lm/pcs ; Width : 20mm ; Minimum cutting unit : 14LEDs/100mm ;
	④Flexible modular DT8140-24V-20mm	Material : FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 19.2W/M ; Lumen : 2490Lm/M ; Width : 20mm ; Minimum cutting unit : 14LEDs/100mm ;

Chain GLS3535 LED Linear Light

Suspended & Surface Mounted

Matching GAS3535 Curve Lighting System

Picture	Item	Parameter
	Pendant cable PN-WA2/4	Steel cable: D1.5*2000/4000mm/maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size:20AWG\2000mm\maximum load bearing:6.5Kg
	Connect fitting EX-26	Size : L30*W23.5*H4.6mm
	Surface mounted buckle CL-05	
	⑤Screw set	Size : M3.5*40mm

Optical Parameter

GLS3535-1000 module/DT8140-24V-20mm light source, frosted diffuser

