




## DL3003 Series Recessed LED Downlight

### Features


1. Recessed design with one or two head for our choices, On-off, triac dimmable, DALI, 0-10V for option.
2. 0-350° rotating horizontally, 0-90° tilting vertically.
3. Anti-glare ring available in white, black, silver & golden etc. Lens optional for interchange
4. Beam angle in 20°, 30° and 40°.





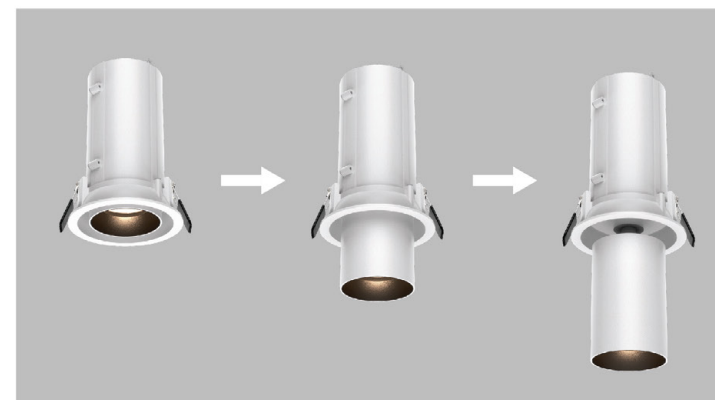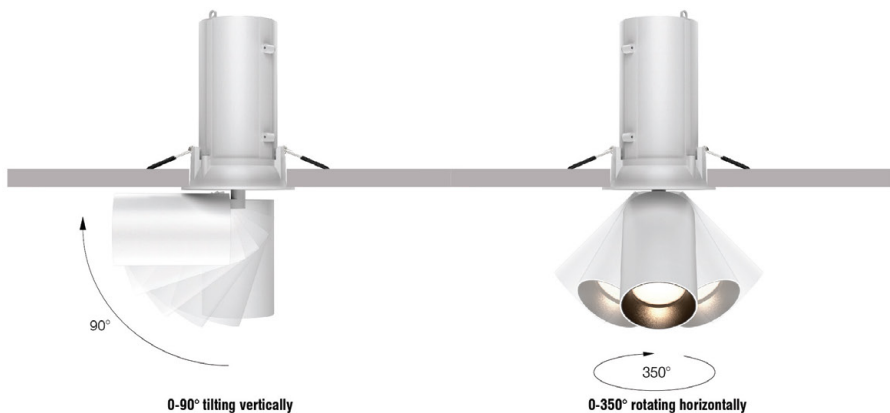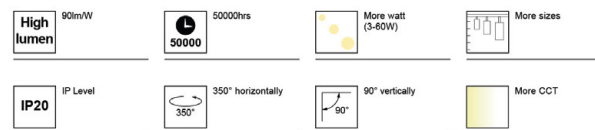

### Application

Shopping mall, hotel.




# DL3003 Series Recessed LED Downlight




**Power:** 3W (350mA/6V)  
**Lamp:** OSRAM SMD (CRI>80) (CRI>90)  
**AC:** 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
30°	GDDL3003-3W-48-30D	250lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
40°	GDDL3003-3W-48-40D	250lm			






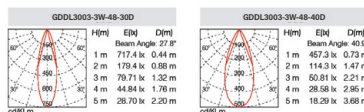


99.4  
 350°  
 F90°  
 Ø58  
 48mm

GDDL3003-3W-48







**Power:** 5W (350mA/9V)  
**Lamp:** EPISTAR COB (CRI>80) (CRI>90)  
**AC:** 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	GDDL3003-5W-65-20D	380lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
30°	GDDL3003-5W-65-30D	380lm			
40°	GDDL3003-5W-65-40D	380lm			









122  
 350°  
 F90°  
 Ø70  
 65mm

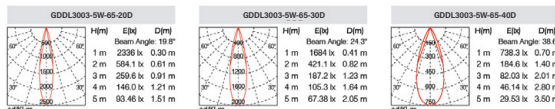GDDL3003-5W-65







**Power:** 10W (250mA/36V)  
**Lamp:** CITIZEN COB (CRI>80) (CRI>90)  
**AC:** 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	GDDL3003-10W-83-20D	900lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 4 2000K - 2800K Dim to warm <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
30°	GDDL3003-10W-83-30D	900lm			
40°	GDDL3003-10W-83-40D	900lm			







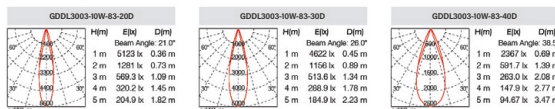

147.4  
 350°  
 F90°  
 Ø95  
 83mm

GDDL3003-10W-83







**Power:** 2x5W (350mA/18V)  
**Lamp:** CITIZEN COB (CRI>80) (CRI>90)  
**AC:** 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	GDDL3003-2x5W-65-20D	760lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 4 2000K - 2800K Dim to warm <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
30°	GDDL3003-2x5W-65-30D	760lm			
40°	GDDL3003-2x5W-65-40D	760lm			







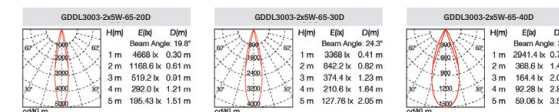

122  
 350°  
 F90°  
 Ø65x65mm

GDDL3003-2x5W-65







**Power:** 2x10W (500mA/36V)  
**Lamp:** CITIZEN COB (CRI>80) (CRI>90)  
**AC:** 200-240V


Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	GDDL3003-2x10W-83-20D	1800lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 4 2000K - 2800K Dim to warm <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
30°	GDDL3003-2x10W-83-30D	1800lm			
40°	GDDL3003-2x10W-83-40D	1800lm			







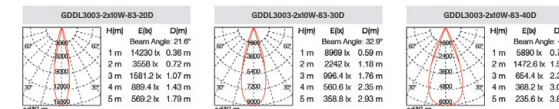

147  
 350°  
 F90°  
 Ø83x90mm

GDDL3003-2x10W-83







**Power:** 2x30W (1400mA/36V)  
**Lamp:** CITIZEN COB (CRI>80) (CRI>90)  
**AC:** 200-240V

Beam Angle	Model	Lumen	Finish	LED Colour	LED Driver
20°	GDDL3003-2x30W-120-20D	5400lm	<input type="checkbox"/> 1 Matt White <input type="checkbox"/> 2 Matt Black <input type="checkbox"/> 3 Silver	<input type="checkbox"/> 1 3000K <input type="checkbox"/> 2 4000K <input type="checkbox"/> 3 5000K <input type="checkbox"/> 4 2000K - 2800K Dim to warm <input type="checkbox"/> 5 2700K	<input type="checkbox"/> 1 On and off <input type="checkbox"/> 2 Triac dimmable <input type="checkbox"/> 3 1-10V dimmable <input type="checkbox"/> 4 Dali <input type="checkbox"/> 5 Bluetooth
30°	GDDL3003-2x30W-120-30D	5400lm			
40°	GDDL3003-2x30W-120-40D	5400lm			



180  
 350°  
 F90°  
 Ø120x118mm

GDDL3003-2x30W-120

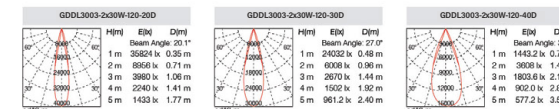

## DL3003 Series Recessed LED Downlight

