



**greenlux**  
cost reduction LED lighting

# Rubix COB Series 03 LED Downlight

Available in 15W / 20W / 25W  
80% lumen maintenance at 50,000 hours

- Fixed Angle and Gimbal options
- 0 ~ 30° gimbal tilt
- High CRI architectural design light
- Traic / 0-10V / Dali dimmable options
- No UV or IR rays. No mercury
- Replaces traditional recessed lights
- High quality Sharp COB Chipset
- High light output 95lm/W
- High quality Aluminum housing
- IP20 Rated
- 5 Years Warranty
- Applications includes cafes, restaurants, hotels, shops walkways, museums & display cases



## Specifications

<b>Colour Range</b>	2700 ~ 6500k
<b>Power Consumption</b>	15W / 20W / 25W
<b>Luminous Flux</b>	95lm/W
<b>Input Voltage</b>	100V/240V AC
<b>Output Voltage</b>	36V
<b>Current</b>	400 / 550 / 700mA
<b>Beam angle</b>	15° / 25° / 38°
<b>CRI</b>	>90
<b>Power Factor</b>	>0.95
<b>Chipset</b>	Sharp COB
<b>Driver</b>	Class II

## Dimensions & Materials

<b>Product Dimensions (mm)</b>	133 * 133 * 150
<b>Cutout (mm)</b>	126 * 126
<b>Housing Material</b>	Aluminum Alloy + Powder Coating
<b>Housing Colour</b>	White / Silver / Black

IES

LM80

RCM

SAA

IP20

TUV

CE

5 Yrs  
Warranty




**greenlux**  
cost reduction LED lighting




# Rubix COB Series 03 LED Downlight

Available in 15W / 20W / 25W  
80% lumen maintenance at 50,000 hours

## Dimension & Photometrics

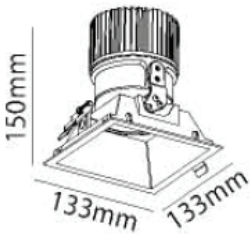

126 x 126mm

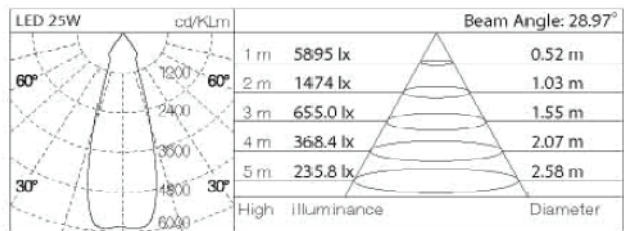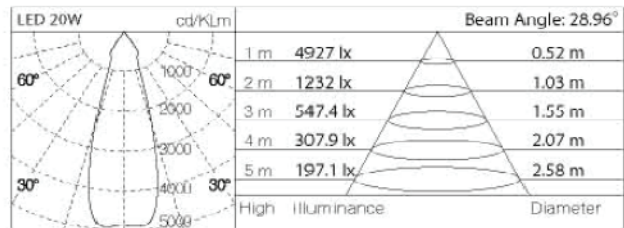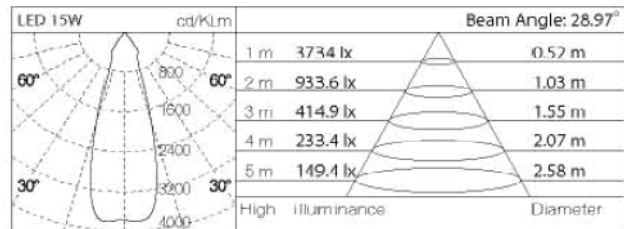

## Model

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT	Lumens	Power	LED
GJRUB-15W-C03					1425	15W	
GJRUB-20W-C03	133*133*150	126*126	15°/25°/38°	2700-6500k	1900	20W	Sharp COB
GJRUB-25W-C03					2375	25W	