


Vega Series Deep Recessed LED Downlight

High CRI 90 Architectural Design
80% lumen maintenance at 50,000 hours

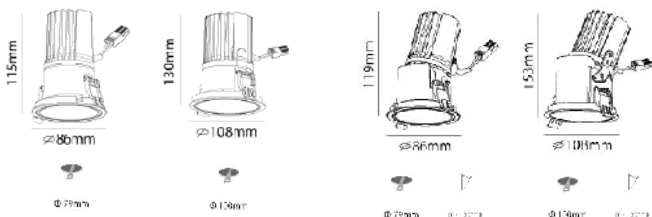

- High CRI >90 or >95 (options)
- Anti-glare, Low UGR <19
- Fixed Angle and Gimbal option available
- Dimmable and Non-Dimmable option available
- COB LED chips with high luminous flux
- Applications include restaurants, offices, shops, schools, hotels & households. Also widely used for public areas such as stairways, lobby, receptions & corridors.

Beam angle	15° / 25° / 38° / 50°
CRI	>90
Power Factor	>0.95
Chipset	COB
Driver	Class II
Dimmable (option)	Triac / 0-10V / DALI

Specifications






Colour Range	2700-5000k
Power Consumption	7W/10W/13W/15W/18W
Lumen	525/750/975/1125/1350lm
Input Voltage	AC 100-240V

Dimensions & Materials

		Cutout
Product Dimensions (mm)	Ø86*119	Ø79
	Ø108*153	Ø100
Housing Material	Aluminum Housing	



Vega Series Deep Recessed LED Downlight

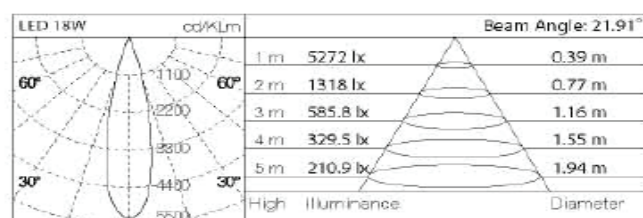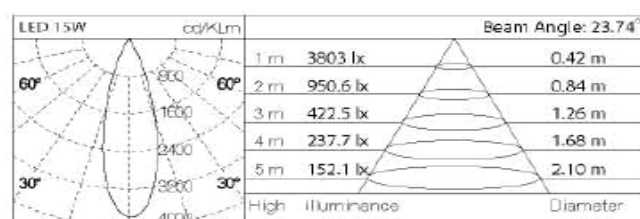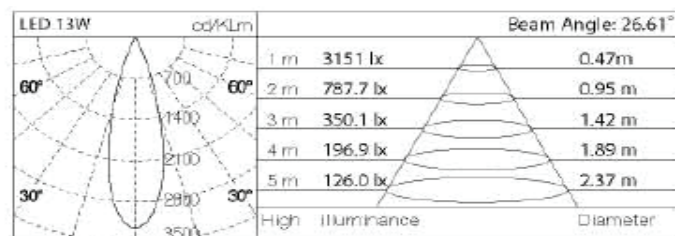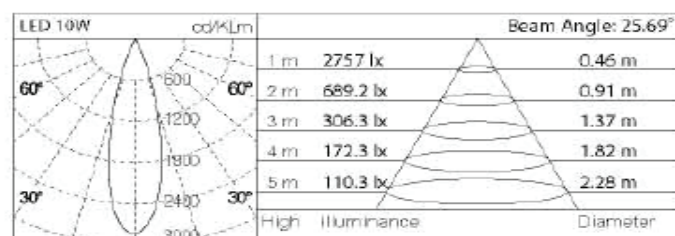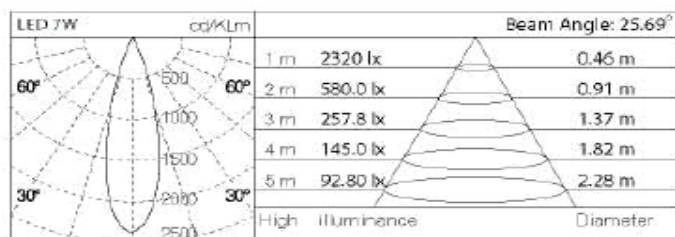

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT (k)	Lumens	Wattage	LED	Dimmer (option)
GJVEG-7W-DL	Ø86*119	Ø80			525	7W		
GJVEG-10W-DL	Ø86*119	Ø80		2700k	750	10W		Triac
GJVEG-13W-DL	Ø86*119	Ø80	15°/25°/38°/50°	3000k	975	13W	COB	0-10V
GJVEG-15W-DL	Ø108*153	Ø100		4000k	1125	15W		DALI
GJVEG-18W-DL	Ø108*153	Ø100		5000k	1350	18W		